




## Tensioner Devices

Type SE/SE-G/SE-W

Type SE-R

Type SE-I

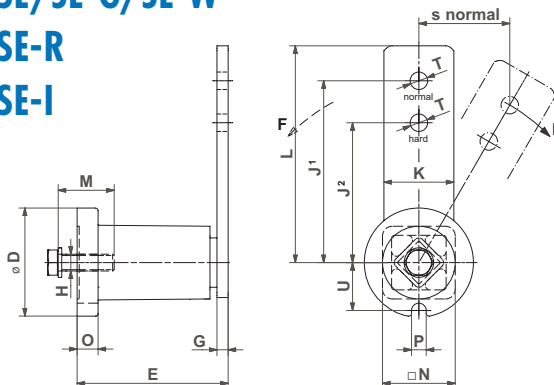

### Standard Tensioner Devices Types SE / SE-G / SE-W

Type	Art. No.	D	E	G	H	J <sup>1</sup>	J <sup>2</sup>	K	L	M	N	O	P	T	U	Weight [kg]
<b>SE 11</b> SE 11-G	<b>06 011 001</b> 06 013 201	35	51 <sup>+1</sup> <sub>-0.5</sub>	5	M6	80	60	20	90	20	22	6	8	8.5	16.5	0.2
<b>SE 15</b> SE 15-G SE 15-W	<b>06 011 002</b> 06 013 202 06 015 002	45	64 <sup>+1</sup> <sub>-0.5</sub>	5	M8	100	80	25	112.5	25	30	8	8.5	10.5	20.8	0.4
<b>SE 18</b> SE 18-G SE 18-W	<b>06 011 003</b> 06 013 203 06 015 003	58	79 <sup>+1.5</sup> <sub>-0.5</sub>	7	M10	100	80	30	115	30	35	10.5	8.5	10.5	25.3	0.6
<b>SE 27</b> SE 27-G SE 27-W	<b>06 011 004</b> 06 013 204 06 015 004	78	108 <sup>+2</sup> <sub>-0.5</sub>	8	M12	130	100	50	155	40	52	15	10.5	12.5	34.3	1.7
<b>SE 38</b> SE 38-G SE 38-W	<b>06 011 005</b> 06 013 205 06 015 005	95	140 <sup>+2</sup> <sub>-0.5</sub>	10	M16	175	140	60	205	40	66	15	12.5	20.5	42.0	3.6
<b>SE 45</b> SE 45-G SE 45-W	<b>06 011 006</b> 06 013 206 06 015 006	115	200 <sup>+3</sup> <sub>-1</sub>	12	M20	225	180	70	260	50	80	18	12.5	20.5	52.0	6.4
<b>SE 50</b> SE 50-G SE 50-W	<b>06 011 007</b> 06 013 207 06 015 007	130	210 <sup>+3</sup> <sub>-1</sub>	20	M24	250	200	80	290	60	87	20	17	20.5	57.5	9.0

### SE-R Tensioning element with strengthened tensioning arm

Type	Art. No.	D	E	G	H	J <sup>1</sup>	J <sup>2</sup>	K	L	M	N	O	P	T	U	Weight [kg]
<b>SE-R 15</b>	06 011 702	45	64 <sup>+1</sup> <sub>-0.5</sub>	5	M8	100	80	25	112.5	25	30	8	8.5	10.5	20.8	0.4
<b>SE-R 18</b>	06 011 703	58	79 <sup>+1.5</sup> <sub>-0.5</sub>	7	M10	100	80	30	115	30	35	10.5	8.5	10.5	25.3	0.6

### SE-I Tensioning element made out of stainless steel, INOX

Type	Art. No.	D	E	G	H	J <sup>1</sup>	J <sup>2</sup>	K	L	M	N	O	P	T	U	Weight [kg]
<b>SE-I 15</b>	06 071 111	45	64 <sup>+1</sup> <sub>-0.5</sub>	5	M8	100	80	25	112.5	25	30	8	8.5	10.5	20.8	0.4
<b>SE-I 18</b>	06 071 112	58	79 <sup>+1.5</sup> <sub>-0.5</sub>	7	M10	100	80	30	115	30	35	10.5	8.5	10.5	25.3	0.7
<b>SE-I 27</b>	06 071 113	78	108 <sup>+2</sup> <sub>-0.5</sub>	8	M12	130	100	50	155	40	52	15	10.5	12.5	34.3	2.1
<b>SE-I 40</b>	06 071 104	100	140 <sup>+2</sup> <sub>-0.5</sub>	10	M16	175	140	70	205	40	70	15	12	20.5	41.5	3.8

Further product and performance datas on pages 4.4–4.5.