

# Silicone-NO

## How to order

Silicone-No is available in 310 ml cartridges packed per 12 in a box. Other packaging like 400 ml and 600 ml sausages are available on request. To order your specific Silicone-NO, please find below the article

Colour:	Article code:	EAN code:
White	10324901	8711595087940
Grey	12000333	8711595128889
Concrete Grey	12001014	8711595154796
Light Grey	12000826	8711595138864
Black	10349524	8711595120692
Transparent	10342101	8711595087919
Transparent Grey	10333401	8711595087933
Jasmin	10423101	8711595087872
Manhattan	10422101	8711595087889
Pergamon	11122801	8711595087896
Beige	12005426	8711595181365
Brown	10343401	8711595087858
Bronze	12001015	8711595154819
Anthracite	10414201	8711595131186
Aluminium	12001260	8711595158107
RAL 9002 Grey/White	12001720	8711595163576
Silver Grey	10706701	8711595087957
RAL 9001 Crème White	10875201	8711595087902




## Centre of Excellence

### Better results through Knowledge

Den Braven 's company payoff is "Better results through Knowledge". Our Centre of Excellence accumulates knowledge which provides her with the latest market insights, developments and trends. This knowledge is shared within the Den Braven Group and amongst our customers and end-users.

This process enables our relations to achieve higher efficiency and better results. This is the true meaning of "Better results through Knowledge". Visit our website to discover more about what the Centre of Excellence could mean for you!

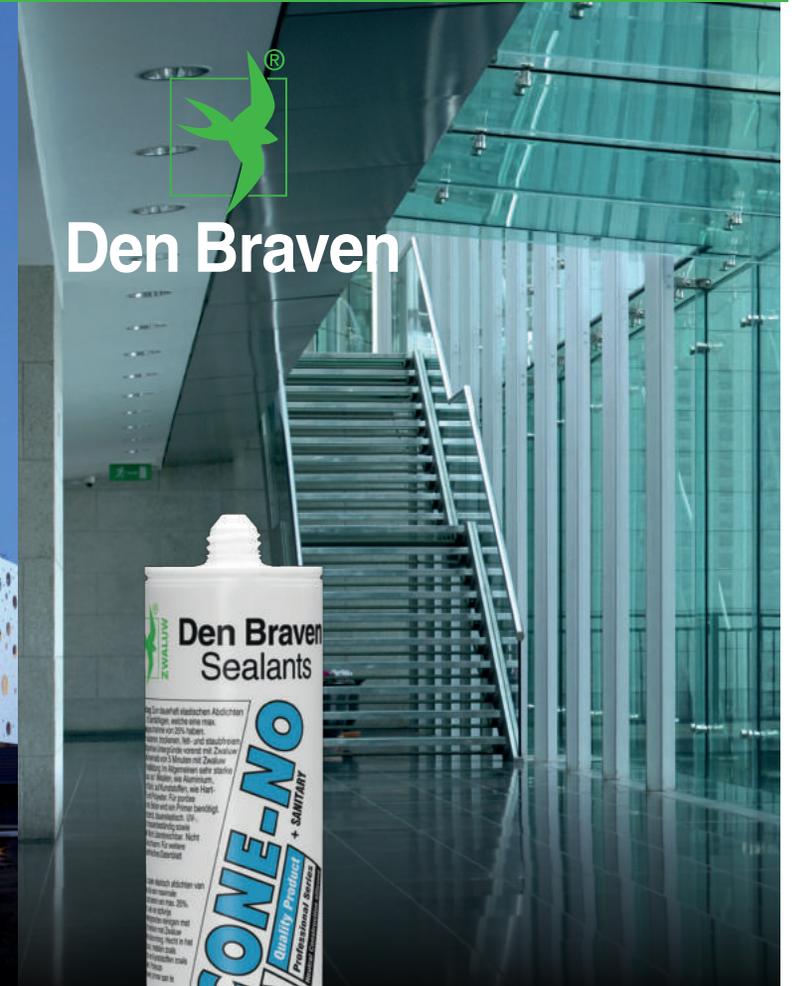

## Den Braven



## Silicone-NO

A versatile neutral silicone sealant for sanitary, building, glazing and facade joints

# Silicone-NO

A versatile neutral silicone sealant for sanitary, building, glazing and facade joints

- Neutral curing silicone
- For façade, glazing and sanitary
- Perfect bonding without primer
- Excellent resistance to UV, water and weather
- Tested till 1050 Pa on air loss in passive housing



## Silicone-NO

### Product Descriptions

Silicone-NO is a versatile neutral silicone sealant for sanitary, building, glazing and façade joints, which cures under influence of humidity to form a durable elastic rubber.

### Applications

Silicone-NO is specially developed for durable elastic sealing of expansion joints in concrete and brickwork, connections joints, curtain wall constructions, glazing systems, kitchens, bathrooms, showers and industrial applications.

### Certifications

EN 15651-1: F-EXT-INT-CC 25LM

EN 15651-2: G-CC 25LM

EN 15651-3: S XS2

EN 1026: Air loss (till 1050 Pa and 0,018m<sup>3</sup>/h @ 650 Pa)



## Silicone-NO

### Technical Performances

Density	1,02 g/ml
Shore-A hardness	16°
Elongation at break	500%
Tensile strength	1,22 Mpa
Skin formation	8 minutes
Curing time	2 mm/day
Permeability	an = 0,018 m <sup>3</sup> /h
Permeability test	till 1050 Pa

Visit our website to download the full technical specifications of the Silicone-NO.



### Visit Den Braven YouTube channel

Den Braven offers a wide variety of USP, Application and Commercial movies via here website and YouTube channel. Scan the below displayed QR Code to visit the USP movie of the original Silicone-NO:

